## MARION COUNTY SURVEYOR'S OFFICE

DEBRA S. JENKINS MARION COUNTY SURVEYOR SECTION CORNER RECORD SEC. 33 TWN.  $15_{\text{N}}$  RNG.  $5_{\text{E}}$ 

BRYAN F. CATLIN, PLS TECHNICAL SUPERVISOR

Date: 1-12-10


Party Chief: Wilcoxen


Crew: Finney

Type of Marker: 4" x 4" con. monu. with cut 'x' Method of Establishment: County: 1-12-2010

IN S.P.C. E Zone, NAD 83 (1986)

Name: 15053304 N: 494 686.758 6(m) E: 72 325.268 0(m)



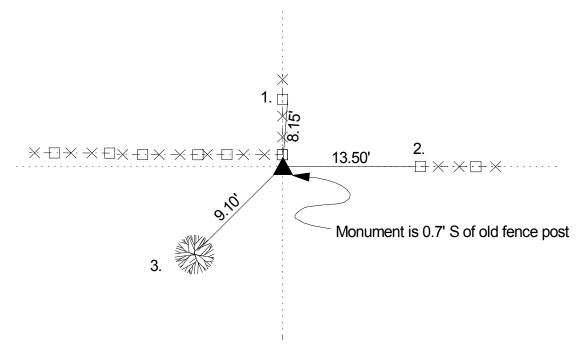

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 14" beech bearing N 17 W 10 links and a 6" beech bearing S 52 W 12 links (Marion County Atlas p. 14). A survey by D.B. Hasbrook on September 11& 12, 1854 indicates no stone but a found witness: 16" beech bearing N 18 and 49 links in an unknown direction (Franklin Legal Book p. 14). Corner was found during Adams Farm Title Survey Job# 121-3157 by MSE on 6/21/1996. Corner was referenced by Wilcoxen on 1/12/2010 and called a 4"by 4" concrete monument with cut x.

REF.	DISTANCE	DESCRIPTION
REF.	DISTANCE	DESCRIPTION
1.	8.15'	Mag nail E Fence Post 5" up
2.	13.50'	Mag nail W Fence Post 48" up
3.	9.10'	Mag nail NE 4" Hackberry 6" up